PATENT COOPERATION TREATY

PCT

REC'D 22 FEB 2001

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's	or ager	t's file reference			Notification of Transmittal of International
72178 Je	n/cor		FOR FURTHER AC	TION Pre	liminary Examination Report (Form PCT/IPEA/416)
Internationa	l applic	ation No.	International filing date (d	lay/month/year	Priority date (day/month/year)
PCT/DK0	0/001	55	29/03/2000		29/03/1999
Internationa B65D33/		t Classification (IPC) or na	tional classification and IPC	;	
Applicant		otal			
DANISCO	J A/5				
1. This in and is	nterna trans	tional preliminary exami mitted to the applicant a	ination report has been p according to Article 36.	prepared by I	his International Preliminary Examining Authority
2. This f	REPOR	RT consists of a total of	4 sheets, including this	cover sheet.	
b	een ar	nended and are the bas	d by ANNEXES, i.e. she sis for this report and/or a D7 of the Administrative	sheets conta	scription, claims and/or drawings which have ning rectifications made before this Authority nder the PCT).
These	e anne	xes consist of a total of	4 sheets.		
3. This r	eport o	contains indications rela	ting to the following item	ns:	, ·
1	\boxtimes	Basis of the report			
П		Priority			:
III		Non-establishment of o	pinion with regard to no	velty, inventiv	e step and industrial applicability
IV		Lack of unity of invention			
v	⊠	Reasoned statement un citations and explanation	nder Article 35(2) with re ons suporting such state	egard to nove ment	Ity, inventive step or industrial applicability;
VI		Certain documents cite	ed		,
. VII		Certain defects in the ir	nternational application		
VIII		Certain observations of	n the international applic	cation	
Date of sub	missio	n of the demand		Date of comp	letion of this report
05/00/20	00			20.02.2001	

05/09/2000	20.02.2001	
Name and mailing address of the international preliminary examining authority:	Authorized officer	is a second and the second
European Patent Office D-80298 Munich	Jervelund, N	
Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Telephone No. +49 89 2399 2649	SCAND DUNC - 374 PUT

Form PCT/IPEA/409 (cover sheet) (January 1994)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

I. Basis of the report

1. This report has been drawn on the basis of (substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments (Rules 70.16 and 70.17).): Description, pages:

3-11	as originally filed			
1,2,2a	as received on	01/02/2001	with letter of	31/01/2001
Claims, No.:				
Claims, No				
3 (part),4-10	as originally filed			
1,2,3 (part)	as received on	01/02/2001	with letter of	31/01/2001
Drawings, sheets:				

- 1/4-4/4 as originally filed
- 2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- the language of publication of the international application (under Rule 48.3(b)).
- the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).
- 3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:
 - $\hfill\square$ contained in the international application in written form.
 - filed together with the international application in computer readable form.
 - furnished subsequently to this Authority in written form.
 - furnished subsequently to this Authority in computer readable form.
 - □ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
 - The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/DK00/00155

- 4. The amendments have resulted in the cancellation of:
 - ☐ the description, pages:
 - ☐ the claims, Nos.:
 - □ the drawings, sheets:
- 5. This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

- 6. Additional observations, if necessary:
- V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- 1. Statement

Novelty (N)		Claims Claims	1-10
Inventive step (IS)		Claims Claims	1-10
Industrial applicability (IA)	Yes: No:	Claims Claims	1-10

2. Citations and explanations see separate sheet





INTERNATIONAL PRELIMINARY Internation REPORT - SEPARATE SHEET

Part V:

1. Reference is made to the following documents:

D1: WO 99/10246 A

2. D1 is considered as representing the nearest prior art, and discloses a package according to the preamble of claim 1.

The features of the characterising portion of claim 1, defining that the transverse connection between the top wall and the adjacent side wall comprises a heat-sealed peelable connection, provides an inexpensive, easy to open, gas-tight package.

Such a package having a heat-sealed peelable connection is neither disclosed in the available prior art, nor regarded as being obvious to the skilled person.

Consequently the subject-matter of claim 1 meets the requirements of Articles 33(2) and 33(3) PCT.

3. Dependent claims 2 to 10 concern modifications of the inventive idea embodied in claim 1, and thus they also meet the requirements of Articles 33(2) and 33(3) PCT.

Title: Stand-up bag for flowable or pourable products.

Technical Field

The invention relates to a stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

5 - two opposing side walls sealed together along lateral edges thereof by means of side seams;

- an inwardly folded bottom wall extending between the lower portions of the side walls and sealed to the respective side walls along transverse bottom seams and along bottom side seams; and

10 - an inwardly folded top wall extending between the upper portions of the side walls and connected to the respective side walls along transverse top connections and sealed to the respective side walls along top seams.

Background Art

Stand-up bags of this type are known inter alia from US-A-3,935,993 and
DE-A1-2553854. Due their excellent standing properties and stability the bags have been used for a wide range of products, in particular for liquid, paste-like, powdery and granular products. It is however considered a drawback of the known stand-up bags that they are difficult to open why a pair of scissors or a knife is often needed or - as for instance known from WO 93/16928 and EP-A2-0.380.110 - they are provided with special discharging arrangements for easy removal of the product which makes the bag more expensive.

The above EP-A2 0380110 further discloses a stand-up bag of the type stated in the

AMENDED SHEET

2

preamble to claim 1 of the present invention and wherein the transverse top connections between the upper edge portions of the top wall and the upper edge portions of the respective side walls are non-peelable connections. The bag is provided with a closable discharge nozzle in the upper portion of one of the side walls for discharging the contents of the bag.

Finally WO 99/10246 discloses a bag having an inwardly folded top wall and comprising a reclosable fastening member between the upper edge portion of the top wall and an upper edge portion of the adjacent side wall. In the shown and described embodiment the reclosable fastening member is formed of a plastic zipper. In

10 addition hereto on page 5, lines 13-14 the following examples of reclosable fastening members are mentioned: a plastic zipper with a slider, an adhesive fastener, VELCRO and snaps. However none of the mentioned or shown fasteners are capable of providing a gas-tight connection or closure and thus a gas-tight bag. The provision of such fasteners is furthermore both difficult and expensive.

15 Brief Description of the Invention

The object of the invention is to provide a stand-up bag of the above type which is easy to open toollessly and which is simple and inexpensive to manufacture.

The stand-up bag according to the invention is characterised in that at least one of the transverse connections between the top wall and the side walls is a heat-sealed peelable connection provided between an upper edge portion of the top wall and an upper edge portion of the adjacent side wall. The bag is thereby easily opened by gripping the top wall and the side wall connected by means of the peelable connection and pulling the two walls apart such that the peelable connection is

25 broken.

According to the invention the upper edge portions of the top wall and the side wall

AMENDED SHEET

01-02-2001

20

may extend beyond the transverse peelable connection to form gripping members to be gripped when the peelable connection is to be broken. In addition to facilitating the opening of the bag, this embodiment of the invention is advantageous in that the portion of the top wall extending beyond the peelable connection may serve as a form
of spout after the bag has been opened.

Furthermore according to the invention the peelable connection may comprise a film strip arranged between the upper edge portions of the top wall and the side walls, said film strip being firmly (non-peelably) heat-sealed to one of the edge portions, preferably to the edge portion of the top wall, the strip having a first surface of a

10 sealing medium corresponding substantially to the sealing medium of the adjacent bag wall, and heat-sealed peelably to the second edge portion, preferably the edge portion of the side wall, the strip having a second surface of a sealing medium heat-sealed peelably to the sealing medium of the adjacent bag wall.

When the inner sealing medium of the bag walls is substantially made from 15 polyethylene (PE), the first outer sealing medium layer of the film strip may be made

Claims

1. Stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

5 - two opposing side walls (1, 2) sealed together along lateral edges thereof by means of side seams (5, 6);

- an inwardly folded bottom wall (4) extending between the lower portions of the side walls (1, 2) and sealed to the respective side walls (1,2) along transverse bottom seams (7, 8) and along bottom side seams; and

10 - an inwardly folded top wall (3) extending between the upper portions of the side walls (1, 2) and connected to the respective side walls (1, 2) along transverse top connections (11, 12) and sealed to the respective side walls (1, 2) along top side seams,

c h a r a c t e r i s e d in that at least one of the transverse connections between the
top wall (3) and the side walls is a heat-sealed peelable connection (12, 32, 42, 52)
provided between an upper edge portion (16, 36) of the top wall (3) and an upper
edge portion (15) of the adjacent side wall (2).

Stand-up bag according to claim 1, c h a r a c t e r i s e d in that the upper edge portions (16, 36; 15) of the top wall (3) and of the side walls (2) extends
 beyond the transverse peelable connection (12, 32, 42, 52) to form gripping members.

3. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (12) comprises a film strip (17) arranged between the upper edge portions (16,15) of the top wall (3) and the side wall (2), said film strip being firmly

AMENDED SHEET

F. .. ENT COOPERATION TREA

	From the INTERNATIONAL BUREAU		
РСТ	То:		
NOTIFICATION OF ELECTION (PCT Rule 61.2)	Commissioner US Department of Commerce United States Patent and Trademark Office, PCT 2011 South Clark Place Room CP2/5C24 Arlington, VA 22202		
Date of mailing (day/month/year)	ETATS-UNIS D'AMERIQUE		
01 November 2000 (01.11.00)	in its capacity as elected Office		
International application No. PCT/DK00/00155	Applicant's or agent's file reference 72178Jen/cor		
International filing date (day/month/year)	Priority date (day/month/year)		
29 March 2000 (29.03.00)	29 March 1999 (29.03.99)		
Applicant · · · · · · · · · · · · · · · · · · ·			
05 Septembe	r 2000 (05.09.00) mational Bureau on:		
 2. The election X was was not made before the expiration of 19 months from the priority Rule 32.2(b). 	date or, where Rule 32 applies, within the time limit under		
The International Bureau of WIPO	Authorized officer		
34, chemin des Colombettes 1211 Geneva 20, Switzerland	Nestor Santesso		
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38		

Form PCT/IB/331 (July 1992)

:

. .



.

.

, Y

14

۰ ،

INT	m the: ERNATI	ONA	L PRELIMINARY EXAMIN			
	IAS. H			Sagstype J.nr.	Ing.	PCT
DK		Сор	ns Boulevard 33 Jenhagen V	- 6 DEC. 2	<u>San</u>	WRITTEN OPINION
				AS 400 TII	IVEM	(PCT Rule 66)
				<u>Cor</u>	Date of mailing (day/month/yea	ar) 04.12.2000
• •	licant's o 178 Jei	•	ent's file reference			E within 3 month(s) from the above date of mailing
				International filing date (dev/month/veer)	Priority date (day/month/year)
	mational	• •	ication No.	29/03/2000	aay/monu/yea/)	29/03/1999
inte	mational	Pate	ent Classification (IPC) or b	oth national classification ar	ia iPC	
B6	5D33/1	6			····	
Арр	licant					
DA	NISCO	A/8	S et al.			
1. 2.				wn up by this Internation elating to the following it		Examining Authority.
			Desis of the estimate			
	1	N N	Basis of the opinion		.*	
)) 111			opinion with regard to pr	wolty inventive	step and industrial applicability
	III IV	_	Lack of unity of invent		verty, inventive	step and industrial applicability
	v	Ø	Reasoned statement u			elty, inventive step or industrial applicability;
	VI		Certain document cite	d		
	VII	\boxtimes	Certain defects in the	international application		
	VIII		Certain observations of	on the international appli	cation	
3.	The ap	plica	ant is hereby invited to	reply to this opinion.		
	When?			d above. The applicant may rant an extension, see Rule		ation of that time limit,
	How?			ply, accompanied, where an uage of the amendments, so		endments, according to Rule 66.3. I 66.9.
	Also:		For the examiner's obliga	nity to submit amendments, tion to consider amendment cation with the examiner, se	s and/or argumer	nts, see Rule 66.4 bis.
	lf no re	ply i	s filed, the international pre	liminary examination report	will be establishe	d on the basis of this opinion.
4.	The fina examin	al dat ation	e by which the internationa report must be established	I preliminary I according to Rule 69.2 is: 2	29/07/2001.	
					Authorized offic	er / Examiner
		xam	g address of the internation ining authority:	a	Jervelund, N	STATES WEINER
	<i>M</i>		opean Patent Office 0298 Munich			cer (incl. extension of time limits)
	<u> </u>	Tel.	+49 89 2399 - 0 Tx: 52365 : +49 89 2399 - 4465	66 epmu d	Berger, K	+49 89 2399 2576

Form PCT/IPEA/408 (cover sheet) (January 1994)

WRITTEN OPINION

I. Basis of the opinion

1. This opinion has been drawn on the basis of (substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed".):

Description, pages:

1-11 as originally filed

Claims, No.:

1-10 as originally filed

Drawings, sheets:

- 1/4-4/4 as originally filed
- 2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- the language of publication of the international application (under Rule 48.3(b)).
- the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).
- 3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:
 - contained in the international application in written form.
 - filed together with the international application in computer readable form.
 - furnished subsequently to this Authority in written form.
 - furnished subsequently to this Authority in computer readable form.
 - The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
 - The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.
 - 4. The amendments have resulted in the cancellation of:
 - □ the description, pages:
 - □ the claims, Nos.:

WRITTEN OPINION

- □ the drawings, sheets:
- 5. This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

- 6. Additional observations, if necessary:
- V. Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement		
Novelty (N)	Claims	
Inventive step (IS)	Claims	1-10
Industrial applicability (IA)	Claims	

2. Citations and explanations see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted: see separate sheet

WRITTEN OPINION SEPARATE SHEET

Part V:

1. Reference is made to the following documents:

D1: WO 99/10246 A D2: EP 380110 A

A copy of the documents D1 and D2 is attached to this communication.

- The present application does not satisfy the criterion set forth in Article 33(3) PCT because the subject-matter of Claim 1 does not involve an inventive step (Rule 65(1)(2) PCT).
- 2.1 Document D1, which is considered to represent the most relevant state of the art, discloses (cf. Fig. 2 and 3) a stand-up bag from which the subject-matter of claim 1 differs only in that the bag comprises an inwardly folded bottom and top wall sealed to the respective side walls.

However, such inwardly folded top and bottom walls are described in document D2 (see in particular Fig. 1, and column 4, lines 50-60 and column 5, lines 40-50) as providing the same advantages as in your application. The skilled person would therefore regard it as a normal design option to include such walls in the stand-up bag described in document D1 in order to solve the problem posed.

3. Dependent Claims 2 - 10 do not appear to contain any additional features which, in combination with the features of any claim to which they refer, involve an inventive step, as they are considered as being within the scope of the customary practice followed by persons skilled in the art, especially as the advantages thus achieved can be readily contemplated in advance.

Part VII.

1. To meet the requirements of Rule 6.3(b) PCT the independent claim should be properly cast in the two part form, with those features which in combination are part of the prior art (see document D1) being placed in the preamble.



WRITTEN OPINION

SEPARATE SHEET



International application No. PCT/DK00/00155

1

N

2. Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the document D2 is not mentioned in the description, nor is this document identified therein.

Form PCT/Separate Sheet/408 (Sheet 2) (EPO-April 1997)

09/937205 C16 Rec'd PCT/PTO SEP 2 1 2001

REPLACED BY ART 34 AMDT

Title: Stand-up bag for flowable or pourable products.

Technical Field

The invention relates to a stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

two opposing side walls sealed together along lateral edges thereof by means of side seams;

- an inwardly folded bottom wall extending between the lower portions of the side walls and sealed to the respective side walls along transverse bottom seams and along bottom side seams; and

10 - an inwardly folded top wall extending between the upper portions of the side walls and connected to the respective side walls along transverse top connections and sealed to the respective side walls along top seams.

Background Art

Stand-up bags of this type are known inter alia from US-A-3,935,993 and DE-A1-2553854. Due their excellent standing properties and stability the bags have been used for a wide range of products, in particular for liquid, paste-like, powdery and granular products. It is however considered a drawback of the known stand-up bags that they are difficult to open why a pair of scissors or a knife is often needed or - as for instance known from WO 93/16928 and EP-A2-0.380.110 - they are provided with special discharging arrangements for easy removal of the product which makes the bag more expensive.

1

Brief Description of the Invention

K

The object of the invention is to provide a stand-up bag of the above type which is easy to open toollessly and which is simple and inexpensive to manufacture.

5 The stand-up bag according to the invention is characterised in that at least one of the transverse connections between the top wall and the side walls is a peelable connection provided between an upper edge portion of the top wall and an upper edge portion of the adjacent side wall. The bag is thereby easily opened by gripping the top wall and the side wall connected by means of the peelable connection and

10 pulling the two walls apart such that the peelable connection is broken.

According to the invention the upper edge portions of the top wall and the side wall may extend beyond the transverse peelable connection to form gripping members to be gripped when the peelable connection is to be broken. In addition to facilitating the opening of the bag, this embodiment of the invention is advantageous in that the

15 portion of the top wall extending beyond the peelable connection may serve as a form of spout after the bag has been opened.

Furthermore according to the invention the peelable connection may comprise a film strip arranged between the upper edge portions of the top wall and the side walls, said film strip being firmly (non-peelably) heat-sealed to one of the edge portions,

- 20 preferably to the edge portion of the top wall, the strip having a first surface of a sealing medium corresponding substantially to the sealing medium of the adjacent bag wall, and heat-sealed peelably to the second edge portion, preferably the edge portion of the side wall, the strip having a second surface of a sealing medium heat-sealed peelably to the sealing medium of the adjacent bag wall.
- 25 When the inner sealing medium of the bag walls is substantially made from polyethylene (PE), the first outer sealing medium layer of the film strip may be made

•

2

Claims

٢

1. Stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

5 - two opposing side walls (1, 2) sealed together along lateral edges thereof by means of side seams (5, 6);

- an inwardly folded bottom wall (4) extending between the lower portions of the side walls (1, 2) and sealed to the respective side walls (1,2) along transverse bottom seams (7, 8) and along bottom side seams; and

an inwardly folded top wall (3) extending between the upper portions of the side walls (1, 2) and connected to the respective side walls (1,2) along transverse top connections (11, 12) and sealed to the respective side walls (1, 2) along top side seams,

c h a r a c t e r i s e d in that at least one of the transverse connections between the
top wall (3) and the side walls is a peelable connection (12, 32, 42, 52) provided
between an upper edge portion (16, 36) of the top wall (3) and an upper edge portion (15) of the adjacent side wall (2).

Stand-up bag according to claim 1, c h a r a c t e r i s e d in that the upper edge portions (16, 36; 15) of the top wall (3) and of the side walls (2) extends
 beyond the transverse peelable connection (12, 32, 42, 52) to form gripping members.

3. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (15) comprises a film strip (17) arranged between the upper edge portions (16,15) of the top wall (3) and the side wall (2), said film strip being firmly



ORIGINAL SPECIFICATION

١,



WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B65D 33/16, 33/18	A1	(11) International Publication Number: WO 00/58166
		(43) International Publication Date: 5 October 2000 (05.10.00)
 (21) International Application Number: PCT/DK (22) International Filing Date: 29 March 2000 ((30) Priority Data: PA 1999 00425 29 March 1999 (29.03.99) (71) Applicant (for all designated States except US): D A/S [DK/DK]; Langebrogade 1, P.O. Box 17, Copenhagen K (DK). (72) Inventor; and (75) Inventor/Applicant (for US only): SCHULZ, [DK/DK]; Plantagen 87, DK-8700 Horsens (DK). (74) Agent: CHAS. HUDE A/S; H.C. Andersens Bould DK-1780 Copenhagen V (DK). 	(29.03.0 D DANISC DK-100 Werm	 BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). er Published With international search report. Before the expiration of the time limit for amending the

(54) Title: STAND-UP BAG FOR FLOWABLE OR POURABLE PRODUCTS

(57) Abstract

A stand-up bag of heat-sealable plastic film comprising two opposing side walls (1, 2) sealed together along lateral edges thereof by means of side seams (5, 6), an inwardly folded bottom wall (4)extending between the lower portions of the side walls (1, 2) and sealed to the respective side walls (1, 2) along transverse bottom seams (7) and along bottom side seams, and an inwardly folded top wall (3) extending between the upper portions of the side walls (1, 2) and connected to the respective side walls along transverse top connections (11, 12) and sealed to the respective side walls (1, 2) along top side seams. At least one of the transverse connections between the top wall (3) and the side walls is a peelable connection (12) provided between an upper edge portion (16) of the top wall 83) and an upper edge portion (15) of the adjacent side wall (2).

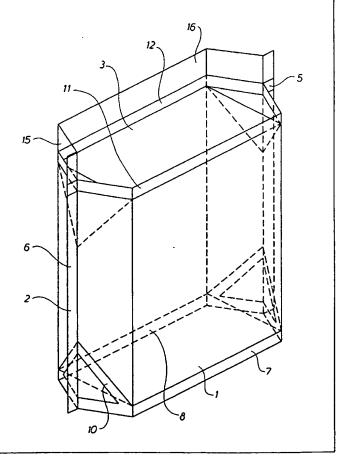

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
АТ	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	мс	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Тодо
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	МК	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	тr	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Itaiy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
СН	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	КР	Democratic People's	NZ	New Zealand		
СМ	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	РТ	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RŬ	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

1

Ŧ



Title: Stand-up bag for flowable or pourable products.

Technical Field

The invention relates to a stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

two opposing side walls sealed together along lateral edges thereof by means of side seams;

- an inwardly folded bottom wall extending between the lower portions of the side walls and sealed to the respective side walls along transverse bottom seams and along bottom side seams; and

10 - an inwardly folded top wall extending between the upper portions of the side walls and connected to the respective side walls along transverse top connections and sealed to the respective side walls along top seams.

Background Art

Stand-up bags of this type are known inter alia from US-A-3,935,993 and
DE-A1-2553854. Due their excellent standing properties and stability the bags have been used for a wide range of products, in particular for liquid, paste-like, powdery and granular products. It is however considered a drawback of the known stand-up bags that they are difficult to open why a pair of scissors or a knife is often needed or - as for instance known from WO 93/16928 and EP-A2-0.380.110 - they are
provided with special discharging arrangements for easy removal of the product which makes the bag more expensive.



Brief Description of the Invention

The object of the invention is to provide a stand-up bag of the above type which is easy to open toollessly and which is simple and inexpensive to manufacture.

The stand-up bag according to the invention is characterised in that at least one of the 5 transverse connections between the top wall and the side walls is a peelable connection provided between an upper edge portion of the top wall and an upper edge portion of the adjacent side wall. The bag is thereby easily opened by gripping the top wall and the side wall connected by means of the peelable connection and pulling the two walls apart such that the peelable connection is broken. 10

According to the invention the upper edge portions of the top wall and the side wall may extend beyond the transverse peelable connection to form gripping members to be gripped when the peelable connection is to be broken. In addition to facilitating the opening of the bag, this embodiment of the invention is advantageous in that the portion of the top wall extending beyond the peelable connection may serve as a form

15 of spout after the bag has been opened.

Furthermore according to the invention the peelable connection may comprise a film strip arranged between the upper edge portions of the top wall and the side walls, said film strip being firmly (non-peelably) heat-sealed to one of the edge portions, preferably to the edge portion of the top wall, the strip having a first surface of a 20 sealing medium corresponding substantially to the sealing medium of the adjacent bag wall, and heat-sealed peelably to the second edge portion, preferably the edge portion of the side wall, the strip having a second surface of a sealing medium heat-sealed peelably to the sealing medium of the adjacent bag wall.

25 When the inner sealing medium of the bag walls is substantially made from polyethylene (PE), the first outer sealing medium layer of the film strip may be made



3

from substantially polyethylene (PE) and the second outer sealing medium layer thereof may comprise a mixture of polyethylene (PE) and polybutylene. As a result a firm seal between the polyethylene layer of the film strip and the inner polyethylene layer of the adjacent bag wall is obtained, while a peelable seal is obtained between the second outer sealing medium layer (which is a mixture of PE and polybutylene) of the film strip and the polyethylene of the adjacent bag wall, the peel strength of the said peelable seal being easy to control.

Moreover according to the invention the peelable connection may comprise a film strip arranged between the upper edges of the top wall and the side wall and having a first and a second outer sealing medium layer with which it is firmly (non-peelably) heat-sealed to the respective edge portions and further having an intermediate layer peelably connected to at least one of the outer sealing medium layers having a tear resistance weaker than the peel strength between the intermediate layer and the said sealing medium layer. The peelable connection is thus opened by tearing the weak sealing medium layer on both sides of the sealing seam and by a delamination between the weak sealing medium layer and the intermediate layer.

In the above embodiment of the invention the intermediate layer may advantageously be formed of a pressure-sensitive adhesive, eg a self-sealing adhesive of the hot-melt type. As described above, the intermediate layer is exposed when the peelable connection of the bag is opened. As the intermediate layer is made from a self-sealing adhesive, the layer adheres to the opposing side wall after the initial opening of the bag to enable reclosure of the bag.

Furthermore according to the invention the peelable connection may comprise a peel lacquer strip of the hot-melt type which is applied to at least one of the mutually
facing surfaces of the top wall and the upper edge portions of the side wall. Such a hot-melt strip is easy to apply and provides the peelable connections with a peel strength which is easy to control.

15



4

Moreover according to the invention above the peelable connection the upper edge portion of the top wall may be folded down to abut the outer face of the adjacent side wall. The free edge of the folded-down edge portion is preferably positioned above the peelable connection between the top wall and the side wall. The folded-down edge portion forms a flap to allow reclosure of the bag after the peelable connection has been opened.

According to the invention above the peelable connection both the upper edge portion of the top wall and the upper edge portion of the adjacent side wall may be folded down onto the adjacent side wall. The folded-down edge portions thereby form a flap

10 to allow reclosure of the bag after the peelable connection has been opened.

In the above embodiments, wherein the upper edge portion of the top wall or both the upper edge portion of the top wall and the upper edge portion of the adjacent side wall are folded down onto the outer face of the adjacent side wall, the fold may advantageously be provided in the same level as the opposite edge of the top wall and the upper edge of the opposite side wall. As a result the bag is provided with

excellent stackability.

Finally according to the invention in the area of the peelable connection the upper edge portion of either the side wall or the top wall may be folded down for abutment inner face to inner face, and the wall with the folded-down edge portion may have
an outer sealing medium layer heat-sealing peelably to the inner sealing medium layer of the other wall. This embodiment of the invention makes it possible to manufacture the bag from a single film web without any further steps.

In the above embodiment of the invention the outer sealing medium layer of the wall with the folded-down edge may advantageously be a copolymer comprising polyethylene and polypropylene when the inner sealing medium layer of the bag walls is made from substantially polyethylene.



The peel strength of the peelable connections may range from 100 to 800 g/20 mm, preferably from 200 to 600 g/20 mm, and most preferably from 300 to 500 g/20 mm.

Brief Description of the Drawings

5 The invention is explained in detail below with reference to the drawings, in which

Fig. 1 is an isometric view of a stand-up bag according to the invention,

Fig. 2 is a side view of a collapsed stand-up bag according to the invention,

Fig. 3 is a sectional view along the line III-III in Fig. 2, the walls of the stand-up bag for purely illustrative reasons being separated from each other and the seals
therebetween thus being partially omitted or shown diagrammatically, Fig. 3 further illustrating a first embodiment of a peelable connection between a side wall and a top wall of the bag,

Fig. 4 is a partial sectional view corresponding to Fig. 3 to illustrate a second embodiment of a peelable connection,

15 Fig. 5 is a partial sectional view corresponding to Fig. 3 to illustrate a third embodiment of the peelable connection,

Fig. 6 is a partial sectional view corresponding to Fig. 3 to illustrate a fourth embodiment of a peelable connection,

Fig. 7 is a partial sectional view corresponding to Fig. 3 through a first modificationof the embodiment shown in Fig. 5, and

WO 00/58166



6

Fig. 8 is a partial sectional view corresponding to Fig. 3 of a second modification of the embodiment shown in Fig. 5.

Best Mode for Carrying Out the Invention

The stand-up bag according to the invention shown in Figs. 1 to 3 comprises two opposed side walls 1,2, a top wall 3 and a bottom wall 4 arranged opposite one another. The side walls 1,2 are sealed together by means of side seams 5,6 extending along two opposed side edges. The bottom wall 4 is folded inwardly along a bottom wall fold 13 and sealed to the side walls 1,2 along two opposed transverse seals 7.8. Correspondingly the top wall 3 is folded inwardly along a top wall fold 14 and sealed to the side wall 1 along an upper transverse seal 11 and connected to the side wall 2 by means of a transverse peelable connection 12. The transverse peelable connection 12 is arranged opposite the transverse seal 11 and is explained in detail below. Furthermore both the folded top wall 3 and the folded bottom wall 4 is sealed onto itself and to the side walls along the side seams 5,6. As illustrated the bag may

15 further have oblique seams 9,10, each extending from the fold area of the bottom wall 4 in the respective side seam 5,6 to the adjacent transverse seams 7,8. Each of the oblique seams 9,10 connects a side wall 1,2 to the adjacent area of the bottom wall 4.

As shown in Figs 1 to 3 an upper edge portion 15 of the side wall 2 extends slightly 20 beyond the transverse peelable connection 12. Correspondingly an upper edge portion 16 of the top wall 3 extends slightly beyond the transverse peelable connection 12 between the top wall 13 and the side wall 2, said edge portions 15,16 forming gripping members to be gripped when the peelable connection 12 is to be broken for opening of the bag.

25 As shown in Figs. 1 to 3 the peelable connection comprises a film strip 17 between the upper edge portions 16,15 of the top wall 3 and the side wall 2, said film strip WO 00/58166

5

20

25



7

being sealed to the edge portion of the top wall 3 by means of a strong seal and sealed to the edge portion 15 of the side wall 2 by means of a peelable seal. This feature is obtained by the strip 17 comprising a first surface 18 of a sealing medium facing the top wall 3, said sealing medium layer corresponding substantially to the sealing medium layer forming the inner surface 19 of the top wall 3 and further comprising a second surface 20 of a sealing medium layer facing the side wall 2, said

- comprising a second surface 20 of a sealing medium layer facing the side wall 2, said sealing medium sealing peelably by heat sealing to the sealing medium layer forming the inner surface 21 of the side wall 2. When the inner surface 19 of the top wall 3 and the inner surface 21 of the side wall 2 is made from polyethylene, the first surface 18 of the strip 17 may also be made from polyethylene, while the second surface 20 thereof may be formed of a mixture of polyethylene and polybutylene. When tearing open the peelable connection 12, the strip 17 remains on the top wall 3 and does not impede the discharge of the product in the bag, the discharge taking place through the upper edge portion 15 of the side wall 2, said portion serving as
- 15 a form of spout.

Even though Fig. 3 illustrates that the side walls 1,2 and the bottom and top walls 4,3 are formed of separate films sealed together, it should be understood that the bag may be formed of a single film web as suggested by means of the dotted lines 22 to 24. A plurality of different plastic laminates may be used for manufacturing the bag according to the invention. Examples hereof include:

When manufacturing the bag from a single film web it is advantageous to use a laminate having both an outer and an inner sealing medium layer such that the bottom wall is sealed onto itself along side seams 5,6 in order obtain the intended good standing ability. This may be obtained by means of the laminate coex OPP/PETP (polyester)/PE, in which the PE-layer is on the inner side seen in relation to the finished bag and coex OPP denotes a co-extruded oriented polypropylene film provided with a thin sealing medium layer on each side comprising a copolymer of PP and PE. In order to obtain enhanced barrier properties a barrier layer, eg an



aluminium film, may be provided between the PETP layer and the PE layer or the coex OPP film. Furthermore the PETP layer may be replaced by an oriented polyamide (OPA).

To further increase the standing properties and stability of the bag, a stronger or
more rigid film may be used for the side walls than for the bottom and top walls. The bag is then made from four sheet webs. The same laminates as mentioned above may be used, thicker laminates being used for the side walls than for the bottom and top walls. However it is also possible to use a PETP/PE laminate (or PETP/PP laminate) for the side walls, in which PE facing inwards seen in relation to the bag, and a
PE/PETP/PE laminate (PP/PETP/PP laminate) or the above coex OPP/PETP/ PE laminate for the bottom and top walls. Also in the instance PETP may be replaced by OPA and the laminates may comprise a barrier layer for instance in form of an aluminium film.

It should further be noted that the bag may be formed from a single film web and from four separate film webs on a vertical form, fill and seal machine. The same applies to the manufacture of pre-fabricated bags, ie ready-made bags apart from one side seam.

Fig. 4 illustrates a second embodiment of a peelable connection 32 between the upper edge portion 15 of the side wall 2 and the upper edge portion 16 of the top wall 3.

- This peelable connection 32 comprises a film strip 37 arranged between the two edge portions 15 and 16 and having a first surface layer 28 and a second surface layer 29 of a sealing medium corresponding to the sealing medium forming the inner surface 19 of the top wall 3 and the sealing medium layer forming the inner surface 20 of the side wall 2, said film strip thus being heat-sealed non-peelably to the said surfaces.
- 25 An intermediate layer 30 is provided between the two surface layers 28 and 29 and is connected peelably to the second surface layer 29 and preferably connected more firmly to the first surface layer 28. Further the tear resistance of the second surface



layer 29 is weaker than the peel strength between said layer and the intermediate layer 30. When the edge portions 15,16 are pulled to open the peelable connection 32, the layer 29 is torn off along the edges of the transverse seam 31 corresponding to the edges of the sealing tool used. Furthermore a delamination takes place between

5 the layer 29 and the intermediate layer 30 in the portion corresponding to the sealing zone. The use of an intermediate layer 30 of a pressure-sensitive adhesive allow for reclosure of the peelable connection 32 and thus of the bag after the initial opening thereof by pressing the exposed portion of the intermediate layer 30 against the corresponding portion of the edge portion 15 of the side wall 2.

10

15

20

Fig. 5 illustrates a third embodiment of a peelable connection 42. This peelable connection comprises a hot-melt strip 47 applied to the inner surface 19 of the upper edge portion 16 of the top wall 3. By activating the hot-melt by means of sealing tools, the peelable connection 42 of a width corresponding to the width of the sealing tolls is provided between the edge portion 15 of the side wall 2 and the edge portion 16 of the top wall 3 in the transverse sealing zone 41.

Fig. 6 illustrates a fourth embodiment of a peelable connection 52 between the upper edge portion 15 of the side wall and the upper edge portion 36 of the top wall 3. The upper edge portion 36 of the top wall is folded down for abutment inner face to inner face such that the outer surface 38 of the top wall 3 faces the inner surface 20 of the side wall 3. As the outer surface 38 of the top wall 3 is formed of a sealing medium sealing peelably to the inner surface 20 of the side wall, the peelable connection 52 is provided in a transverse sealing zone 51 in a width corresponding to the width of

the sealing tool used to seal the upper edge portion 36 of the top wall 3 to the upper

25 edge portion 15 of the side wall 2. In this embodiment of the peelable connection it is advantageous to use the above coex OPP/PETP/PE laminate for the top wall 3 and the side wall 2.

In the embodiments described above a plastic zipper comprising matable, reclosable



zipper elements may be arranged above the peelable connection 12, 32, 42, 52, said elements carried by the opposed surfaces of the upper edge portion of the side wall 2 and the edge portion of the top wall 3. respectively in order to provide the bag with reclosability. In a manner known per se the zipper elements may be formed integrally

5 with the respective upper edge portion or be arranged on zipper element strips sealed to the respective upper edge portions.


Fig. 7 illustrates a first modification of the embodiment described with reference to
Fig. 5. In this modification the upper end portion of the top wall 3 is provided with an extension 53 which is folded down (at reference numeral 59) onto the outer face
of the upper edge portion 15 of the side wall 2. The free edge 54 of extension 53 is situated above the seam 41 providing the peelable connection 42 between the side wall 2 and the top wall 3. The extension 53 thus forms a flap on the bag allowing for reclosability.

The flap or extension 53 is further sealed to the outer face of the side wall 2 in the 15 area of the side seams 5,6 of the side wall. By suitably selecting the material forming the inner surface of the top wall 3 and the outer surface of the side wall, the flap is fusion-sealed to the side wall 2 in the area of the side seams 5,6, whereby optimum reclosability is obtained.

It should be noted that in the modification shown in Fig. 7 also the embodiments described with reference to Figs. 1 to 4 of the reclosable connections 12,32 may be used instead of the embodiment 42 described with reference to Fig. 5.

Moreover, it should be noted that the fold 59 also may be positioned at the same level as the opposed free edge of the top wall and the opposed side wall, as described below in connection with a further modification.

25 Fig. 8 illustrates a second modification of the embodiment described with reference



to Fig. 5. In this modification the upper edge portion 60 of the top wall 3 and the upper edge portion 58 of the side wall 2 are jointly folded down onto the side wall at reference numeral 55. The fold 55 is substantially at the same level as the opposed edge 61 of the top wall 3 and the upper edge 56 of the opposed side wall 1. By arranging the fold 55, the opposed edge 61 of the top wall and the upper edge 56 of the opposed side wall 1 at the same level a bag with good stackability is provided. The lower free edges of the upper folded-down edge portions 58, 60 extend beyond the peelable connection 42 provided between the top wall 3 and the side wall 2 by the sealing zone 41.

- 10 It should furthermore be noted that the hot-melt strip 47' extends onto the foldeddown edge portion 60 of the top wall 3. Thus, at the same time as the peelable connection 42 is provided in the sealing zone 41, an additional peelable connection is provided between the folded-down edge portions 58, 60 in a corresponding sealing zone 57.
- 15 It should be noted that also in the modification shown in Fig. 8 the embodiments described with reference to Figs. 1 to 4 of the reclosable connections 12,32 may be used instead of the embodiment 42 described with reference to Fig. 5.



<u>Claims</u>

1. Stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

5 - two opposing side walls (1, 2) sealed together along lateral edges thereof by means of side seams (5, 6);

- an inwardly folded bottom wall (4) extending between the lower portions of the side walls (1, 2) and sealed to the respective side walls (1,2) along transverse bottom seams (7, 8) and along bottom side seams; and

an inwardly folded top wall (3) extending between the upper portions of the side walls (1, 2) and connected to the respective side walls (1, 2) along transverse top connections (11, 12) and sealed to the respective side walls (1, 2) along top side seams,

c h a r a c t e r i s e d in that at least one of the transverse connections between the
top wall (3) and the side walls is a peelable connection (12, 32, 42, 52) provided
between an upper edge portion (16, 36) of the top wall (3) and an upper edge portion (15) of the adjacent side wall (2).

Stand-up bag according to claim 1, c h a r a c t e r i s e d in that the upper edge portions (16, 36; 15) of the top wall (3) and of the side walls (2) extends
 beyond the transverse peelable connection (12, 32, 42, 52) to form gripping members.

3. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (15) comprises a film strip (17) arranged between the upper edge portions (16,15) of the top wall (3) and the side wall (2), said film strip being firmly

10



13

(non-peelably) heat-sealed to one of the edge portions, preferably to the edge portion of the top wall (3), the strip (17) having a first surface (18) of a sealing medium corresponding substantially to the sealing medium of the adjacent bag wall (3), and heat-sealed peelably to the second edge portion, preferably the edge portion (15) of the side wall (2), the strip (17) having a second surface (20) of a sealing medium heat-sealing peelably to the sealing medium of the adjacent bag wall.

4. Stand-up bag according to claim 3, and wherein the inner sealing medium of the bag walls is made substantially from polyethylene (PE), c h a r a c t e r i s e d in that the first outer sealing medium layer (18) of the film strip (17) comprises a mixture of PE and polybutylene.

5. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (32) comprises a film strip (37) arranged between the upper edges (16,15) of the top wall (3) and the side wall (2) and having a first and a second outer sealing medium layer (28,29) with which it is firmly (non-peelably) heat-sealed

15 to the respective edge portions (16,15) and further having an intermediate layer (30) peelably connected to at least one of the outer sealing medium layers having a tear resistance weaker than the peel strength between the intermediate layer (30) and the said sealing medium layer.

6. Stand-up bag according to claim 5, c h a r a c t e r i s e d in that the20 intermediate layer (30) is a pressure-sensitive adhesive.

7. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (42) comprises a peelable strip of the hot-melt type applied to at least one of the two mutually facing surfaces (19,20) of the upper edge portions (16,15) of the top wall (3) and the side wall (2).

25 8. Stand-up bag according to one or more of the preceding claims,



c h a r a c t e r i s e d in that above the peelable connection (42) the upper edge portion (53) of the top wall is folded down to abut the outer face of the adjacent side wall (2).

9. Stand-up bag according to one or more of the claims 1 to 8,

5 c h a r a c t e r i s e d in that above the peelable connection (42) both the upper edge portions (60) of the top wall (3) and the upper edge portions (58) of the adjacent side wall (2) are folded down onto the adjacent side wall (2).

10. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that in the area of the peelable connection (52) the upper edge portion (36) of the side wall or top wall (3) is folded down for abutment inner face to inner face and that the wall (3) with the folded-down edge portion (36) has an outer sealing medium layer heat-sealing peelably to the inner sealing medium layer (20) of the other wall (2).

10



1 / 4


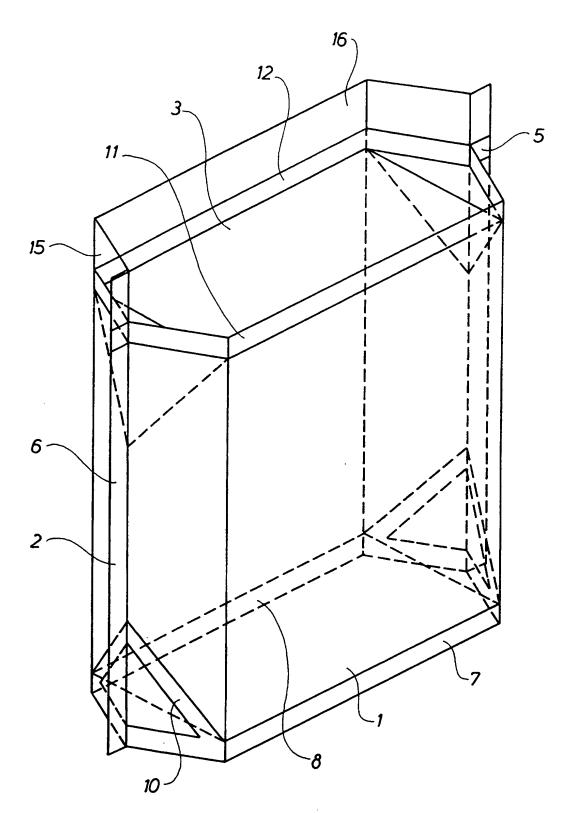


Fig. 1

۰.



2 / 4

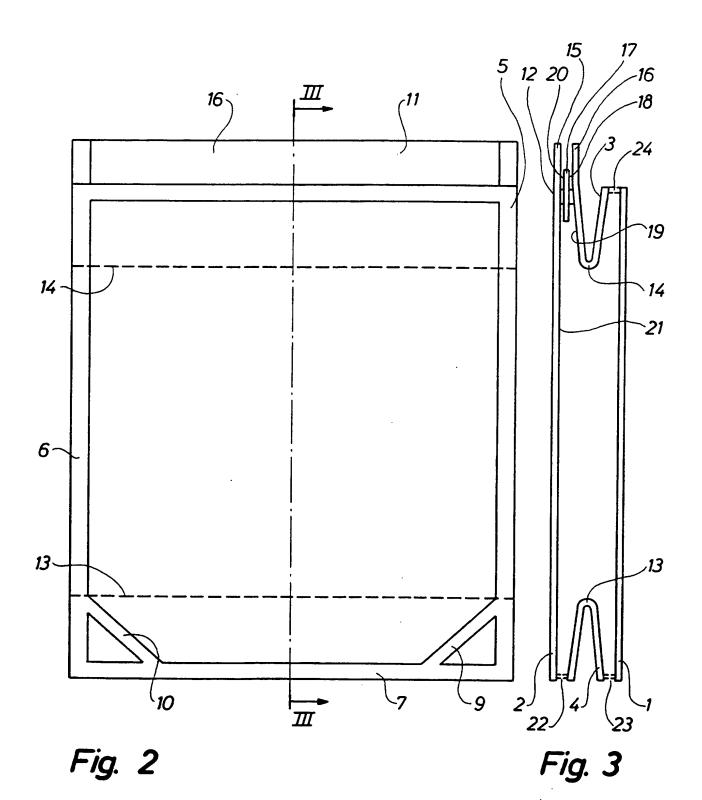



•

á



3 / 4

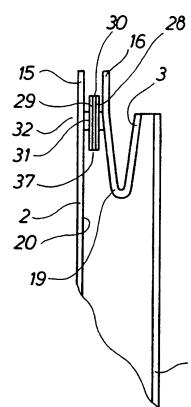

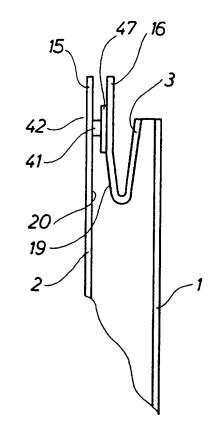

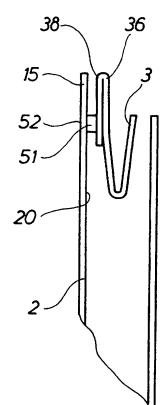


Fig. 4

Fig. 5


Fig. 6

¢

.16



4 / 4

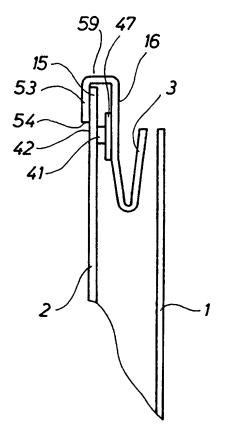

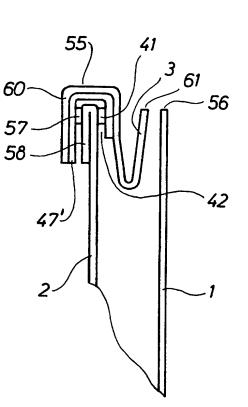


Fig. 7

Fig. 8

INTERNATIONAL SECOCH REPORT

bnal application No.

PCT/DK 00/00155

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B65D 33/16, B65D 33/18 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCU	C. DOCUMENTS CONSIDERED TO BE RELEVANT						
Category*	Citation of document, with indication, where app	propriate, of the relevant passages	Relevant to claim No.				
A	WO 9813271 A1 (TENNECO PACKAGING 2 April 1998 (02.04.98), abs 	1-10					
A	US 5160308 A (HARRY R. PEPPIATT) (03.11.92)	1-10					
A	DE 3925981 A1 (HOECHST AG), 7 Fe (07.02.91)	1-10					
Furthe	er documents are listed in the continuation of Box	C. See patent family annex	•				
"A" docume to be of "E" erlier du "L" docume cited to special "O" docume means "P" docume	categories of cited documents: nt defining the general state of the art which is not considered particular relevance ocument but published on or after the international filing date nt which may throw doubts on priority claim(s) or which is establish the publication date of another citation or other reason (as specified) nt referring to an oral disclosure, use, exhibition or other mt published prior to the international filing date but later than mty date claimed	 "T" later document published after the interdate and not in conflict with the applitute principle or theory underlying the "X" document of particular relevance: the considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the considered to involve an inventive step combined with one or more other such being obvious to a person skilled in the "&" document member of the same patent 	cation but cited to understand invention claimed invention cannot be red to involve an inventive claimed invention cannot be o when the document 1s a documents, such combination e art				
Date of the	e actual completion of the international search	Date of mailing of the international s	earch report				
13 June	2000	2 4: 07. 00					
Name and European NL-2280 I Tel(+31-7	f mailing address of the International Searching Authority Patent Office P.B. 5818 Patentlaan 2 HV Rijswijk 0340-2040, Tx 31 651 epo nl. 70)340-3016	Authorized officer INGER LÖFGREN/Els Telephone No.					

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SECOCH REPORT



Information on patent family members			I	02/12/99		nal application No. 00/00155	
	atent document I in search repor	rt	Publication date		Patent family member(s)		Publication date
WO	9813271	A1	02/04/98	AU EP US	4501497 0934209 5788378	A	17/04/98 11/08/99 04/08/98
US	5160308	A	03/11/92	US	5033867	A	23/07/91
DE	3925981	A1	07/02/91	NON	E		

ó

R



PCT

NOTIFICATION CONCERNING
SUBMISSION OR TRANSMITTAL
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

То:

From the INTERNATIONAL BUREAU

CHAS. HUDE A/S H.C. Andersens Boulevard 33 DK-1780 Copenhagen V DANEMARK

IMPORTANT NOTIFICATION

Date of mailing (day/month/year) 03 May 2000 (03.05.00)

Applicant's or agent's file reference 72178Jen/cor

PCT/DK00/00155

International application No.

International publication date (day/month/year) Not yet published

Priority date (day/month/year) 29 March 1999 (29.03.99)

International filing date (day/month/year)

29 March 2000 (29.03.00)


Applicant

DANISCO A/S et al

- The applicant is hereby notified of the date of receipt (except where the letters "NR" appear in the right-hand column) by the International Bureau of the priority document(s) relating to the earlier application(s) indicated below. Unless otherwise indicated by an asterisk appearing next to a date of receipt, or by the letters "NR", in the right-hand column, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
- 2. This updates and replaces any previously issued notification concerning submission or transmittal of priority documents.
- 3. An asterisk(*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b). In such a case, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
- 4. The letters "NR" appearing in the right-hand column denote a priority document which was not received by the International Bureau or which the applicant did not request the receiving Office to prepare and transmit to the International Bureau, as provided by Rule 17.1(a) or (b), respectively. In such a case, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

Priority date	Priority application No.	<u>Country or regional Office</u> or PCT receiving Office	Date of receipt of priority document
29 Marc 1999 (29.03.99)	PA 1999 00425	DK	14 Apri 2000 (14.04.00)
The International Bu		Authorized officer	
34, chemin des C 1211 Geneva 20, s		J. Leitao	
Facsimile No. (41-22) 740.14.35		Telephone No. (41-22) 338.83.38	

Form PCT/IB/304 (July 1998)





		From the INTERNATIONAL BUREAU		
PCT NOTICE INFORMING THE APPL COMMUNICATION OF THE INT APPLICATION TO THE DESIGN/ (PCT Rule 47.1(c), first se Date of mailing (day/month/year) 05 October 2000 (05.10.00) Applicant's or agent's file reference 72178Jen/cor	ERNATIONAL ATED OFFICES entence)	DK-1780 Cope DANEMARK / AS 400	ARADER V ARADER	
International application No. PCT/DK00/00155		date (day/month/year))00 (29.03.00)	Priority date (day/month/year) 29 March 1999 (29.03.99)	
Applicant DANISCO A/S et al			J	
	he date indicated about the date indicated about the requirement of the regulation of t	s will accept the present taken place on the date y the applicant to the des ent for such a communic ,CN,CR,CU,CZ,DE,D ,LK,LR,LS,LT,LU,LV TJ,TM,TR,TT,TZ,UA their request. Furtherm Rule 49.1 (a-bis)). cation as published by th (2)(a) and Rule 54.2) hase until 30 months (or ust be filed with the common the priority date. ath time limit. PCT Contracting State vion. IONAL PHASE (Article lication in the national p rred to therein before ea to be performed for ent Copy) and Volume II of t	Notice as conclusive evidence that of mailing indicated above and no copy signated Office(s). Exation at this time: DK,DM,EA,EE,EP,ES,FI,GB,GD, J,MA,MD,MG,MK,MN,MW,MX, UG,UZ,VN,YU,ZA,ZW ore, those Offices do not require the the International Bureau on Ilater in some Offices) from the priority spetent International Preliminary which is bound by Chapter II has the cle 22 or 39(1)) hase, he must, within 20 months ch designated or elected Office. ering the national phase, see the	
The International Bureau of W 34, chemin des Colombetto 1211 Geneva 20, Switzerlar	es	Authorized officer	J. Zahra	

L

Ô

Ô

Telephone No. (41-22) 338.83.38

PATENT COOPERATION TREATY

		From the INTERNATIONAL BUREAU			
РСТ		То:			
INFORMATION CONCERNING ELECTED OFFICES NOTIFIED OF THEIR ELECTION (PCT Rule 61.3) Sagstype J.n PP- 7 Date of mailing (day/month/year) 1 U 01 November 2000 (01.11.00)		DK ^{u11780} Cop 78 DANEMARK	ens Boulevard 33 enhagen V		
	AS 400	Til byen			
Applicant's or agent's file reference 72178Jen/cor	<u> </u>	Cor IMPC	ORTANT INFORMATION		
International application No.		date (day/month/year)	Priority date (day/month/year)		
PCT/DK00/00155	29 March 2	000 (29.03.00)	29 March 1999 (29.03.99)		
Applicant DANISCO A/S et al					
 Offices of its election: AP :GH,GM,KE,LS,MW,SD,SL EP :AT,BE,CH,CY,DE,DK,ES,F National :AG,AU,BG,CA,CN,C 2. The following Offices have waived the reby the International Bureau only upon th EA :AM,AZ,BY,KG,KZ,MD,RU OA :BF,BJ,CF,CG,CI,CM,GA,G National :AE,AL,AM,AT,AZ,B, GM,HR,HU,ID,IN,IS,KE,KG,KZ SG,SI,SL,TJ,TM,TR,TT,TZ,UA 3. The applicant is reminded that he must of before each of the Offices listed above. translation of the international applicatic annexes of the international preliminary Some offices have fixed time limits expli- applicable time limits and the acts to be of the PCT Applicant's Guide. 	.,SZ,TZ,UG,ZW I,FR,GB,GR,IE,IT :Z,DE,DZ,IL,JP,K equirement for the m heir request: ,TJ,TM SN,GW,ML,MR,N A,BB,BR,BY,CH,I ,LC,LK,LR,LS,LT ,UG,UZ,VN,YU,Z enter the "national p This must be done b on (Article 39(1)(a)), a examination report ring later than the al performed upon ent	IT,LU,MC,NL,PT,SE KP,KR,MN,NO,NZ,PL,RO,RU,SE,SK,US e notification of their election; the notification will be sent to them ,NE,SN,TD,TG 4,CR,CU,DK,DM,EE,ES,FI,GB,GD,GE,GH, .T,LU,LV,MA,MD,MG,MK,MW,MX,PT,SD, J,ZA,ZW I phase" before the expiration of 30 months from the priority date by paying the national fee(s) and furnishing , if prescribed, a), as well as, where applicable, by furnishing a translation of any			
The International Bureau of W 34. chemin des Colombette		Authorized officer:			
1211 Geneva 20, Switzerlan		Nes	tor Santesso		
Facsimile No. (41-22) 740.14.35		Telephone No. (41-22)	338.83.38		

Form PCT/IB/332 (September 1997)

l

٢

The demand must be filed directly with	h the competent International Preliminary Examining Authority or, if two or more Authorities are competent
with the one chosen by the applicant.	The full name or two-letter code of that Authority may be indicated by the applicant on the line below:
IPEA/CP	

PCT



DEMAND

under Article 31 of the Patent Cooperation Treaty: The undersigned requests that the international application specified below be the subject of international preliminary examination according to the Patent Cooperation Treaty and hereby elects all eligible States (except where otherwise indicated).

For	International Preliminar	y Examining Authorit	y use only		
Identification of IPEA		Date of receipt of D	EMAND		
Box No. I IDENTIFICATION OF T	HE INTERNATIONAL	APPLICATION	Applicant's or agent's file reference 72178 Jen/cor		
International application No.	International filing date	(day/month/year)	(Earliest) Priority date (day/month/year)		
PCT/DK00/00155	29-03-2000 (29032	000)	29-03-1999 (29031999)		
Title of invention	<u> </u>				
STAND-UP BAG FOR FLOWABL	E OR POURABLE P	RODUCTS			
Box No. II APPLICANT(S)					
Name and address: (Family name followed by) The address must include p	given name; for a legal entity,	full official designation.	Telephone No.:		
		, ,	+45 32 66 20 00		
DANISCO A/S 1, Langebrogade			Facsimile No.:		
P.O. Box 17			+45 32 66 21 75		
DK-1001 Copenhagen K Denmark			Teleprinter No.:		
			-		
State (that is, country) of nationality:		State (that is, count	y) of residence:		
Denmark		Denmark			
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.) SCHULZ, Werner 87, Plantagen DK-8700 Horsens Denmark					
State <i>(that is, country)</i> of nationality:		State (that is, count Denmark	by of residence:		
Denmark Denmark Name and address: (Family name followed by given name; for a legal entity; full official designation. The address must include postal code and name of country.)					
State (that is, country) of nationality:		State (that is, country,) of residence:		
Further applicants are indicated on	a continuation sheet.				
Form PCT/IPEA/401 (first sheet) (July 199	8; reprint July 2000)		See Notes to the demand form		

.

-	
Sheet No. 2	International application No. PCT/DK00/00155
BOX NO. III AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CO	RRESPONDENCE
The following person is 🗶 agent 🗌 common representative	
and 🔀 has been appointed earlier and represents the applicant(s) also for international pre	liminary examination.
is hereby appointed and any earlier appointment of (an) agent(s)/common represer	tative is hereby revoked.
is hereby appointed, specifically for the procedure before the International Prelimit the agent(s)/common representative appointed earlier.	nary Examining Authority, in addition t
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)	Telephone No.:
The address must include postal code and name of country.)	+45 33 15 45 14
CHAS. HUDE A/S	Facsimile No.:
33, H.C. Andersens Boulevard	+45 33 15 45 35
DK-1780 Copenhagen V	+43 33 15 43 35
Denmark	Teleprinter No.:
	-
Address for correspondence: Mark this check-box where no agent or common re space above is used instead to indicate a special addr ess to which correspondence	presentative is/has been appointed and t should be sent.
Box No. IV BASIS FOR INTERNATIONAL PRELIMINARY EXAMINATION	
 The applicant wishes the international preliminary examination to start on the basis of: the international application as originally filed the description as originally filed as amended under Article 34 the claims as amended under Article 19 (together with any accompanying as amended under Article 34 the drawings as originally filed as amended under Article 34 the drawings as originally filed as amended under Article 34 The applicant wishes any amendment to the claims under Article 19 to be considered 	; statement)
 The applicant wishes the start of the international preliminary examination to be performed from the priority date unless the International Preliminary Examining Authority is under Article 19 or a notice from the applicant that he does not wish to make such box may be marked only where the time limit under Article 19 has not yet expired Where no check-box is marked, international preliminary examination will start on as originally filed or, where a copy of amendments to the claims under Article 19 and/or at under Article 34 are received by the International Preliminary Examining Authority before or the international preliminary examination report, as so amended. 	estponed until the expiration of 20 mont receives a copy of any amendments may amendments (Rule 69.1(d)). (This chec) the basis of the international application nendments of the international application is than begun to draw up a written opinion
Language for the purposes of international preliminary examination: English	
which is the language in which the international application was filed.	nol ceamb
which is the language of a translation furnished for the purposes of internation	
which is the language of publication of the international application. which is the language of the translation (to be) furnished for the purposes of i	international preliminary examination
Box No. V ELECTION OF STATES	
The applicant hereby elects all eligible States (that is, all States which have been designat the PCT) excluding the following States which the applicant wishes not to elect:	ted and which are bound by Chapter II

Form PCT/IPEA/401 (second sheet) (July 1998; reprint July 2000)

а,

7

See Notes to the demand form

	Sheet N	o. 3	International appl PCT/E	lication No. DK00/00155
Box No. VI CHECK LIST				
The demand is accompanied by the following eler Box No. IV, for the purposes of international pro	ments, in the lang eliminary examin	uage referred to in ation:		onal Preliminary uthority use only
1. translation of international application	:	sheets	received	not received
 amendments under Article 34 	:	sheets		
 copy (or, where required, translation) of amendments under Article 19 	:	sheets		
 copy (or, where required, translation) of statement under Article 19 	:	sheets		
5. letter	:	sheets		
6. other (specify)	:	sheets		
3. copy of general power of attorney,		computer rea		- water water and
3. Copy of general power of attorney; reference number, if any: Box No. VII SIGNATURE OF APPLICANT, A Next to each signature, indicate the name of the person signing		6. X other (specif DMMON REPRESEN hich the person signs (if such	W: Copy of Int. s	
Box No. VII SIGNATURE OF APPLICANT, A	and the capacity in w	6. X other (specif OMMON REPRESEN which the person signs (if such	W: Copy of Int. s	
Teference number, if any: Box No. VII SIGNATURE OF APPLICANT, A Next to each signature, indicate the name of the person signing For Internation	and the capacity in w CHAS. HUD Peter Kim J	6. X other (specif OMMON REPRESEN which the person signs (if such	y): Copy of Int. s ITATIVE capacity is not obvious fo	
Teference number, if any: Box No. VII SIGNATURE OF APPLICANT, A Next to each signature, indicate the name of the person signing For Internation Description of DEMAND:	and the capacity in w CHAS. HUD Peter Kim J	6. X other (specif) OMMON REPRESEN thich the person signs (if such	y): Copy of Int. s ITATIVE capacity is not obvious fo	
 reference number, if any: Box No. VII SIGNATURE OF APPLICANT, A Next to each signature, indicate the name of the person signing For Internation Date of actual receipt of DEMAND: Adjusted date of receipt of demand due to CORRECTIONS under Rule 60.1(b): 	and the capacity in w CHAS. HUD Peter Kim J nal Preliminary E	6. X other (specif)	y): Copy of Int. s ITATIVE capacity is not obvious fo	
 reference number, if any: Box No. VII SIGNATURE OF APPLICANT, A Next to each signature, indicate the name of the person signing Next to each signature, indicate the name of the person signing For Internation Date of actual receipt of DEMAND: Adjusted date of receipt of demand due to CORRECTIONS under Rule 60.1(b): The date of receipt of the demand is AF from the priority date and item 4 or 5, 	and the capacity in w CHAS. HUD Peter Kim J nal Preliminary E	6. X other (specif.	y): Copy of Int. s TATIVE capacity is not obvious fi e only The applican informed acc	rom reading the demand) t has been cordingly.
 reference number, if any: Box No. VII SIGNATURE OF APPLICANT, A Next to each signature, indicate the name of the person signing For Internation Date of actual receipt of DEMAND: Adjusted date of receipt of demand due to CORRECTIONS under Rule 60.1(b): The date of receipt of the demand is AF 	and the capacity in w CHAS. HUD Peter Kim J nal Preliminary E	6. X other (specif.	y): Copy of Int. s TATIVE capacity is not obvious fi e only The applican informed acc	rom reading the demand,

Form PCT/IPEA/401 (last sheet) (July 1998; reprint July 2000)

٠.

. ~};

(

 (\mathbb{D})

See Notes to the demand form



· .

٢

۲



¢


рст	For receiving Office use only
РСТ	
	International Application No.
REQUEST	
-	International Filing Date
The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.	Name of receiving Office and "PCT International Application"
	Applicant's or agent's file reference (if desired) (12 characters maximum) 72178Jen/cor
Box No. I TITLE OF INVENTION	
Stand-up bag for flowable or pourable products.	
Box No. II APPLICANT	
Name and address: (Family name followed by given name; for a designation. The address must include postal code and name of co address indicated in this Box is the applicant's State (that is, country of residence is indicated below.)	unitry. The country of the This person is also inventor
	Telephone No.
DANISCO A/S 1, Langebrogade,	+ 45 32 66 20 00
P.O. Box 17	Facsimile No. +45 32 66 21 75
DK-1001 Copenhagen K	Teleprinter No.
Denmark	-
State (that is, country) of nationality: Denmark	State (that is, country) of residence: Denmark
	ed States except the United States the States indicated in States of America only the Supplemental Box
Box No. III FURTHER APPLICANT(S) AND/OR (FURT	HER) INVENTOR(S)
Name and address: (Family name followed by given name; for a designation. The address must include postal code and name of con address indicated in this Box is the applicant's State (that is, countr, of residence is indicated below.) SCHULZ, Werner 87, Plantagen DK-8700 Horsens Denmark	untry I he country of the 1 This person is
State (that is, country) of nationality: Denmark	State (that is, country) of residence: Denmark
This person is applicant all designated all designated for the purposes of:	ed States except States of America in the United States indicated in the States indicated in the Supplemental Box
Further applicants and/or (further) inventors are indicated	on a continuation sheet.
Box No. IV AGENT OR COMMON REPRESENTATIVE	; OR ADDRESS FOR CORRESPONDENCE
The person identified below is hereby/has been appointed to act of the applicant(s) before the competent International Authorities	
Name and address: (Family name followed by given name; for a designation. The address must include postal c	a legal entity, full official ode and name of country.) + 45 33 15 45 14
CHAS. HUDE A/S	Facsimile No.
33, H.C. Andersens Boulevard	+45 33 15 45 35
DK-1780 Copenhagen V	Teleprinter No.
Denmark	-
Address for correspondence: Mark this check-box where space above is used instead to indicate a special address to	no agent or common representative is/has been appointed and the which correspondence should be sent.

Form PCT/RO/101 (first sheet) (July 1998; reprint January 2000)

See Notes to the request form

)	

Sheet No. 2.

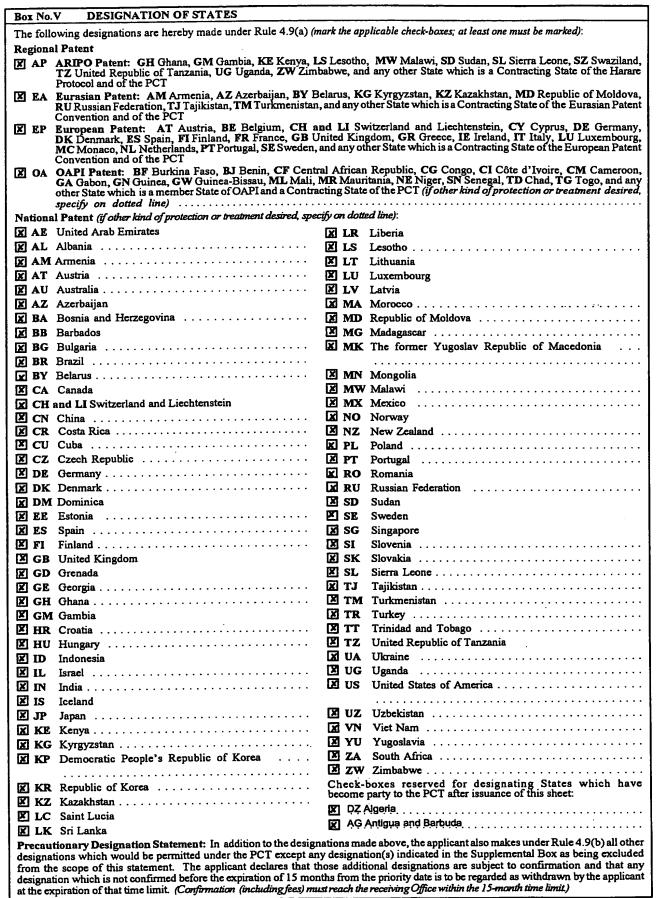

Form PCT/RO/101 (second sheet) (January 2000)

. ?

Ø

٢

Sheet No. 3

Box No. VI PRIORITY C	LAIM	Further p	riority claims are indicated	d in the Supplemental Box.
Filing date	Number		Where earlier applica	tion is:
of earlier application (day/month/year)	of earlier applicatior	national application: country	regional application:* regional Office	international application: receiving Office
item (1) 29 March 1999 -290399	PA 1999 00425	Denmark		
item (2)				
item (3)				
of the earlier application(s purposes of the present int	a) (only if the earlier appendication is application of the second contract of the secon	ansmit to the International l pplication was filed with th is the receiving Office) iden	ne Office which for the tified above as item(s):	
* Where the earlier application is Convention for the Protection of In	dustrial Property for whic	h that earlier application was	Supplemental Box at least of filed (Rule 4.10(b)(ii)). See S	ne country party to the Paris Supplemental Box.
	NAL SEARCHING A			
Choice of International Searcl (if two or more International Sea competent to carry out the intern the Authority chosen; the two-letter	arching Authorities are ational search, indicate	Request to use results of a search has been carried out by Date (day/month/year)		e to that search (if an earlier ational Searching Authority): Country (or regional Office)
SA/ <i>EP</i> O				
Box No. VIII CHECK LIST		ILING		
This international application c he following number of sheet	s:	ional application is accomp lculation sheet	eanied by the item(s) mar	ked below:
request :		ate signed power of attorne	y	
escription (excluding equence listing part) :		of general power of attorne		ny:
laims	-	nent explaining lack of sign		
ibstract :		ty document(s) identified in		
trawings : sequence listing part	•	ation of international applic		or other biological material
of description :		otide and/or amino acid sec		or other biological material readable form
Total number of sheets :	22 9. 🔂 other	(specify): cepy of of	Fletter by DKP	סל
Figure of the drawings which should accompany the abstract		Language of filing of the international application:	English	
	OF APPLICANT OR			
Next to each signature, indicate the no Danisco A/S	ume of the person signing and	the capacity in which the person	signs (if such capacity is not ob	vious from reading the request).
Burnsoo , vo				
BN -	ρ ,	Der	no Ch	e /
Bernd Reinhard, Busines	ss Development Ma	nager Werner Sc	huiz	
	F	or receiving Office use onl	v	
 Date of actual receipt of th international application: 			,	2. Drawings:
 Corrected date of actual re- timely received papers or d the purported international 	rawings completing	· · · ·		received:
 Date of timely receipt of the corrections under PCT Art 	icle 11(2):			not received:
5. International Searching Au (if two or more are compet	thority ent): ISA /		nittal of search copy delay earch fee is paid.	yed .
Date of receipt of the record of		International Bureau use o	nly	
by the International Bureau:				
orm PCT/RO/101 (last sheet)	(July 1998; reprint Janu	ary 2000)		See Notes to the request form



• • •

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference 72178Jen/cor	FOR FURTHER ACTION	see Notification of T (Form PCT/ISA/220	ransmittal of Internatio)) as well as, where app	licable, item 5 below.
International application No.	International filing date	(day/month/year)	(Earliest) Priority D	ate (day/month/year)
PCT/DK 00/00155	29 March 2000		29 March 1999	
Applicant				
DANISCO A/S et al				
This international search report has applicant according to Article 18. A	been prepared by this Int copy is being transmitted	ternational Searching to the Internation	ng Authority and is tr al Bureau.	ansmitted to the
This international search report cons	sists of a total of 2	sheets.		
It is also accompanied by a	a copy of each prior art d	locument cited in the	nis report.	
1. Certain claims were found	unsearchable (See Box I).			
2. Unity of invention is lacking	g (See Box II).			
3. The international application international search was ca	on contains disclosure of arried out on the basis of	a nucleotide and/or the sequence listing	r amino acid sequence 3	e listing and the
	iled with the internationa	l application.		
	furnished by the applican	t separately from t	ne international appli	cation,
	but not accommatter going b	panied by a staten beyond the disclosu	nent to the effect that are in the internationa	application as filed.
	transcribed by this Autho	rity.		
	the text is approved as su			
	the text has been establis	hed by this Author	ity to read as follows	
5. With regard to the abstract,	the text is approved as su	bmitted by the app	licant.	
	the text has been establish in Roy III. The applicant	ned, according to F may, within one m	Rule 38.2(b), by this A nonth from the date of	Authority as it appears of mailing of this inter-
	national search report, su	bmit comments to	this Authority.	
6. The figure of the drawings to b	e published with the abstr	act is:		
Figure No. 1	as suggested by the appl	icant.		None of the figures.
	because the applicant fai			
	because this figure better	r characterizes the	invention.	

Form PCT/ISA/210 (first sheet) (July 1	992))
--	------	---

INTERNATICAL SEARCH REPORT

ernational application No. PCT/DK 00/00155

Α.	CLASSIF	ICATION OF	SUBJECT MATTER	3

IPC7: B65D 33/16, B65D 33/18 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCU	MENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where app	ropriate, of the relevant passages	Relevant to claim No.
A	WO 9813271 A1 (TENNECO PACKAGING 2 April 1998 (02.04.98), abs	INC.), tract	1-10
A	US 5160308 A (HARRY R. PEPPIATT) (03.11.92)	, 3 November 1992	1-10
A	DE 3925981 A1 (HOECHST AG), 7 Fe (07.02.91)	bruary 1991	1-10
		· · · · · · · · · · · · · · · · · · ·	
		<u>.</u>	
		·	
وراجي ومن		and a second	
Furth	er documents are listed in the continuation of Box	C. X See patent family annex	κ.
"A" docum to be o "E" erlier o	categories of cited documents: ent defining the general state of the art which is not considered of particular relevance locument but published on or after the international filing date	"T" later document published after the intu- date and not in conflict with the appli- the principle or theory underlying the "X" document of particular relevance: the considered novel or cannot be considered	cation but cited to understand invention claimed invention cannot be red to involve an inventive
cited to	ent which may throw doubts on priority claim(s) or which is o establish the publication date of another citation or other reason (as specified)	step when the document is taken along "Y" document of particular relevance: the	e claimed invention cannot be
"O" docum	ent referring to an oral disclosure, use, exhibition or other	considered to involve an inventive ste combined with one or more other suc being obvious to a person skilled in the	h documents, such combination
"P" docum	ent published prior to the international filing date but later than ority date claimed	"&" document member of the same patent	family
	e actual completion of the international search	Date of mailing of the international 2 4. 07. 00	search report
<u>13 Jun</u>		Authorized officer	
Europea NL-2280 Tel(+31-	nd mailing address of the International Searching Authority in Patent Office P.B. 5818 Patentlaan 2 I HV Rijswijk 70)340-2040, Tx 31 651 epo nl, -70)340-3016	INGER LÖFGREN/Els Telephone No.	


•

Form PCT/ISA/210 (second sheet) (July 1992)

:

ł ł

	Inform	ation on	patent family members	(02/12/99	PCT/DK	00/00155
	atent document 1 in search repor	rt	Publication date		Patent family member(s)	• <u></u>	Publication date
WO	9813271	A1	02/04/98	AU EP US	4501497 0934209 5788378	Α	17/04/98 11/08/99 04/08/98
US	5160308	Α	03/11/92	US	5033867	A	23/07/91
DE	3925981 3 925981	A1	07/02/91	NON			



1.

Title: Stand-up bag for flowable or pourable products.

Technical Field

The invention relates to a stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

5 - two opposing side walls sealed together along lateral edges thereof by means of side seams;

- an inwardly folded bottom wall extending between the lower portions of the side walls and sealed to the respective side walls along transverse bottom seams and along bottom side seams; and

10 - an inwardly folded top wall extending between the upper portions of the side walls and connected to the respective side walls along transverse top connections and sealed to the respective side walls along top seams.

Background Art

Stand-up bags of this type are known inter alia from US-A-3,935,993 and DE-A1-2553854. Due their excellent standing properties and stability the bags have been used for a wide range of products, in particular for liquid, paste-like, powdery and granular products. It is however considered a drawback of the known stand-up bags that they are difficult to open why a pair of scissors or a knife is often needed or - as for instance known from WO 93/16928 and EP-A2-0.380.110 - they are provided with special discharging arrangements for easy removal of the product which makes the bag more expensive.

The above EP-A2 0380110 further discloses a stand-up bag of the type stated in the

AMENDED SHEET

(

5

2

preamble to claim 1 of the present invention and wherein the transverse top connections between the upper edge portions of the top wall and the upper edge portions of the respective side walls are non-peelable connections. The bag is provided with a closable discharge nozzle in the upper portion of one of the side walls for discharging the contents of the bag.

Finally WO 99/10246 discloses a bag having an inwardly folded top wall and comprising a reclosable fastening member between the upper edge portion of the top wall and an upper edge portion of the adjacent side wall. In the shown and described embodiment the reclosable fastening member is formed of a plastic zipper. In
addition hereto on page 5, lines 13-14 the following examples of reclosable fastening members are mentioned: a plastic zipper with a slider, an adhesive fastener, VELCRO and snaps. However none of the mentioned or shown fasteners are capable of providing a gas-tight connection or closure and thus a gas-tight bag. The provision of such fasteners is furthermore both difficult and expensive.

15 Brief Description of the Invention

The object of the invention is to provide a stand-up bag of the above type which is easy to open toollessly and which is simple and inexpensive to manufacture.

The stand-up bag according to the invention is characterised in that at least one of the transverse connections between the top wall and the side walls is a heat-sealed peelable connection provided between an upper edge portion of the top wall and an upper edge portion of the adjacent side wall. The bag is thereby easily opened by gripping the top wall and the side wall connected by means of the peelable connection and pulling the two walls apart such that the peelable connection is broken.

According to the invention the upper edge portions of the top wall and the side wall

AMENDED SHEET

5

10

20

may extend beyond the transverse peelable connection to form gripping members to be gripped when the peelable connection is to be broken. In addition to facilitating the opening of the bag, this embodiment of the invention is advantageous in that the portion of the top wall extending beyond the peelable connection may serve as a form of spout after the bag has been opened.

Furthermore according to the invention the peelable connection may comprise a film strip arranged between the upper edge portions of the top wall and the side walls, said film strip being firmly (non-peelably) heat-sealed to one of the edge portions, preferably to the edge portion of the top wall, the strip having a first surface of a sealing medium corresponding substantially to the sealing medium of the adjacent bag wall, and heat-sealed peelably to the second edge portion, preferably the edge portion of the side wall, the strip having a second surface of a sealing medium heat-sealed peelably to the sealing medium of the adjacent bag wall.

When the inner sealing medium of the bag walls is substantially made from polyethylene (PE), the first outer sealing medium layer of the film strip may be made 15

rotedo" soezégeben

from substantially polyethylene (PE) and the second outer sealing medium layer thereof may comprise a mixture of polyethylene (PE) and polybutylene. As a result a firm seal between the polyethylene layer of the film strip and the inner polyethylene layer of the adjacent bag wall is obtained, while a peelable seal is obtained between the second outer sealing medium layer (which is a mixture of PE and polybutylene) of the film strip and the polyethylene of the adjacent bag wall, the peel strength of

of the film strip and the polyethylene of the adjacent bag wall, the peel strength of the said peelable seal being easy to control.

Moreover according to the invention the peelable connection may comprise a film strip arranged between the upper edges of the top wall and the side wall and having a first and a second outer sealing medium layer with which it is firmly (non-peelably) heat-sealed to the respective edge portions and further having an intermediate layer peelably connected to at least one of the outer sealing medium layers having a tear resistance weaker than the peel strength between the intermediate layer and the said sealing medium layer. The peelable connection is thus opened by tearing the weak sealing medium layer on both sides of the sealing seam and by a delamination between the weak sealing medium layer.

In the above embodiment of the invention the intermediate layer may advantageously be formed of a pressure-sensitive adhesive, eg a self-sealing adhesive of the hot-melt type. As described above, the intermediate layer is exposed when the peelable connection of the bag is opened. As the intermediate layer is made from a self-sealing adhesive, the layer adheres to the opposing side wall after the initial opening of the bag to enable reclosure of the bag.

Furthermore according to the invention the peelable connection may comprise a peel lacquer strip of the hot-melt type which is applied to at least one of the mutually
facing surfaces of the top wall and the upper edge portions of the side wall. Such a hot-melt strip is easy to apply and provides the peelable connections with a peel strength which is easy to control.

5

Moreover according to the invention above the peelable connection the upper edge portion of the top wall may be folded down to abut the outer face of the adjacent side wall. The free edge of the folded-down edge portion is preferably positioned above the peelable connection between the top wall and the side wall. The folded-down

5 edge portion forms a flap to allow reclosure of the bag after the peelable connection has been opened.

According to the invention above the peelable connection both the upper edge portion of the top wall and the upper edge portion of the adjacent side wall may be folded down onto the adjacent side wall. The folded-down edge portions thereby form a flap to allow reclosure of the bag after the peelable connection has been opened.

In the above embodiments, wherein the upper edge portion of the top wall or both the upper edge portion of the top wall and the upper edge portion of the adjacent side wall are folded down onto the outer face of the adjacent side wall, the fold may advantageously be provided in the same level as the opposite edge of the top wall and the upper edge of the opposite side wall. As a result the bag is provided with

excellent stackability.

Finally according to the invention in the area of the peelable connection the upper edge portion of either the side wall or the top wall may be folded down for abutment inner face to inner face, and the wall with the folded-down edge portion may have an outer sealing medium layer heat-sealing peelably to the inner sealing medium layer of the other wall. This embodiment of the invention makes it possible to manufacture the bag from a single film web without any further steps.

In the above embodiment of the invention the outer sealing medium layer of the wall with the folded-down edge may advantageously be a copolymer comprising polyethylene and polypropylene when the inner sealing medium layer of the bag walls is made from substantially polyethylene.

10

15

20

25





5

The peel strength of the peelable connections may range from 100 to 800 g/20 mm, preferably from 200 to 600 g/20 mm, and most preferably from 300 to 500 g/20 mm.

Brief Description of the Drawings

5 The invention is explained in detail below with reference to the drawings, in which

Fig. 1 is an isometric view of a stand-up bag according to the invention,

Fig. 2 is a side view of a collapsed stand-up bag according to the invention,

Fig. 3 is a sectional view along the line III-III in Fig. 2, the walls of the stand-up bag for purely illustrative reasons being separated from each other and the seals
therebetween thus being partially omitted or shown diagrammatically, Fig. 3 further illustrating a first embodiment of a peelable connection between a side wall and a top wall of the bag,

Fig. 4 is a partial sectional view corresponding to Fig. 3 to illustrate a second embodiment of a peelable connection,

15 Fig. 5 is a partial sectional view corresponding to Fig. 3 to illustrate a third embodiment of the peelable connection,

Fig. 6 is a partial sectional view corresponding to Fig. 3 to illustrate a fourth embodiment of a peelable connection,

Fig. 7 is a partial sectional view corresponding to Fig. 3 through a first modification 20 of the embodiment shown in Fig. 5, and

6

Fig. 8 is a partial sectional view corresponding to Fig. 3 of a second modification of the embodiment shown in Fig. 5.

Best Mode for Carrying Out the Invention

- The stand-up bag according to the invention shown in Figs. 1 to 3 comprises two opposed side walls 1,2, a top wall 3 and a bottom wall 4 arranged opposite one another. The side walls 1,2 are sealed together by means of side seams 5,6 extending along two opposed side edges. The bottom wall 4 is folded inwardly along a bottom wall fold 13 and sealed to the side walls 1,2 along two opposed transverse seals 7.8. Correspondingly the top wall 3 is folded inwardly along a top wall fold 14 and sealed to the side wall 1 along an upper transverse seal 11 and connected to the side wall 2 by means of a transverse peelable connection 12. The transverse peelable connection 12 is arranged opposite the transverse seal 11 and is explained in detail below. Furthermore both the folded top wall 3 and the folded bottom wall 4 is sealed onto itself and to the side walls along the side seams 5,6. As illustrated the bag may
- 15 further have oblique seams 9,10, each extending from the fold area of the bottom wall 4 in the respective side seam 5,6 to the adjacent transverse seams 7,8. Each of the oblique seams 9,10 connects a side wall 1,2 to the adjacent area of the bottom wall 4.
- As shown in Figs 1 to 3 an upper edge portion 15 of the side wall 2 extends slightly 20 beyond the transverse peelable connection 12. Correspondingly an upper edge portion 16 of the top wall 3 extends slightly beyond the transverse peelable connection 12 between the top wall 13 and the side wall 2, said edge portions 15,16 forming gripping members to be gripped when the peelable connection 12 is to be broken for opening of the bag.
- As shown in Figs. 1 to 3 the peelable connection comprises a film strip 17 between the upper edge portions 16,15 of the top wall 3 and the side wall 2, said film strip

being sealed to the edge portion of the top wall 3 by means of a strong seal and sealed to the edge portion 15 of the side wall 2 by means of a peelable seal. This feature is obtained by the strip 17 comprising a first surface 18 of a sealing medium facing the top wall 3, said sealing medium layer corresponding substantially to the

5 sealing medium layer forming the inner surface 19 of the top wall 3 and further comprising a second surface 20 of a sealing medium layer facing the side wall 2, said sealing medium sealing peelably by heat sealing to the sealing medium layer forming the inner surface 21 of the side wall 2. When the inner surface 19 of the top wall 3 and the inner surface 21 of the side wall 2 is made from polyethylene, the first surface 18 of the strip 17 may also be made from polyethylene, while the second surface 20 thereof may be formed of a mixture of polyethylene and polybutylene. When tearing open the peelable connection 12, the strip 17 remains on the top wall 3 and does not impede the discharge of the product in the bag, the discharge taking place through the upper edge portion 15 of the side wall 2, said portion serving as a form of spout.

Even though Fig. 3 illustrates that the side walls 1,2 and the bottom and top walls 4,3 are formed of separate films sealed together, it should be understood that the bag may be formed of a single film web as suggested by means of the dotted lines 22 to 24. A plurality of different plastic laminates may be used for manufacturing the bag according to the invention. Examples hereof include:

When manufacturing the bag from a single film web it is advantageous to use a laminate having both an outer and an inner sealing medium layer such that the bottom wall is sealed onto itself along side seams 5,6 in order obtain the intended good standing ability. This may be obtained by means of the laminate coex OPP/PETP (polyester)/PE, in which the PE-layer is on the inner side seen in relation to the finished bag and coex OPP denotes a co-extruded oriented polypropylene film provided with a thin sealing medium layer on each side comprising a copolymer of PP and PE. In order to obtain enhanced barrier properties a barrier layer, eg an

20

25

aluminium film, may be provided between the PETP layer and the PE layer or the coex OPP film. Furthermore the PETP layer may be replaced by an oriented polyamide (OPA).

To further increase the standing properties and stability of the bag, a stronger or
more rigid film may be used for the side walls than for the bottom and top walls. The bag is then made from four sheet webs. The same laminates as mentioned above may be used, thicker laminates being used for the side walls than for the bottom and top walls. However it is also possible to use a PETP/PE laminate (or PETP/PP laminate) for the side walls, in which PE facing inwards seen in relation to the bag, and a
PE/PETP/PE laminate (PP/PETP/PP laminate) or the above coex OPP/PETP/ PE laminate for the bottom and top walls. Also in the instance PETP may be replaced by OPA and the laminates may comprise a barrier layer for instance in form of an aluminium film.

It should further be noted that the bag may be formed from a single film web and from four separate film webs on a vertical form, fill and seal machine. The same applies to the manufacture of pre-fabricated bags, ie ready-made bags apart from one side seam.

Fig. 4 illustrates a second embodiment of a peelable connection 32 between the upper edge portion 15 of the side wall 2 and the upper edge portion 16 of the top wall 3.

- 20 This peelable connection 32 comprises a film strip 37 arranged between the two edge portions 15 and 16 and having a first surface layer 28 and a second surface layer 29 of a sealing medium corresponding to the sealing medium forming the inner surface 19 of the top wall 3 and the sealing medium layer forming the inner surface 20 of the side wall 2, said film strip thus being heat-sealed non-peelably to the said surfaces.
- 25 An intermediate layer 30 is provided between the two surface layers 28 and 29 and is connected peelably to the second surface layer 29 and preferably connected more firmly to the first surface layer 28. Further the tear resistance of the second surface

layer 29 is, weaker than the peel strength between said layer and the intermediate layer 30. When the edge portions 15,16 are pulled to open the peelable connection 32, the layer 29 is torn off along the edges of the transverse seam 31 corresponding to the edges of the sealing tool used. Furthermore a delamination takes place between

5 the layer 29 and the intermediate layer 30 in the portion corresponding to the sealing zone. The use of an intermediate layer 30 of a pressure-sensitive adhesive allow for reclosure of the peelable connection 32 and thus of the bag after the initial opening thereof by pressing the exposed portion of the intermediate layer 30 against the corresponding portion of the edge portion 15 of the side wall 2.

10

15

Fig. 5 illustrates a third embodiment of a peelable connection 42. This peelable connection comprises a hot-melt strip 47 applied to the inner surface 19 of the upper edge portion 16 of the top wall 3. By activating the hot-melt by means of sealing tools, the peelable connection 42 of a width corresponding to the width of the sealing tolls is provided between the edge portion 15 of the side wall 2 and the edge portion 16 of the top wall 3 in the transverse sealing zone 41.

Fig. 6 illustrates a fourth embodiment of a peelable connection 52 between the upper edge portion 15 of the side wall and the upper edge portion 36 of the top wall 3. The upper edge portion 36 of the top wall is folded down for abutment inner face to inner face such that the outer surface 38 of the top wall 3 faces the inner surface 20 of the side wall 3. As the outer surface 38 of the top wall 3 is formed of a sealing medium sealing peelably to the inner surface 20 of the side wall, the peelable connection 52 is provided in a transverse sealing zone 51 in a width corresponding to the width of the sealing tool used to seal the upper edge portion 36 of the top wall 3 to the upper edge portion 15 of the side wall 2. In this embodiment of the peelable connection it is advantageous to use the above coex OPP/PETP/PE laminate for the top wall 3 and

the side wall 2.

In the embodiments described above a plastic zipper comprising matable, reclosable

zipper elements may be arranged above the peelable connection 12, 32, 42, 52, said elements carried by the opposed surfaces of the upper edge portion of the side wall 2 and the edge portion of the top wall 3, respectively in order to provide the bag with reclosability. In a manner known per se the zipper elements may be formed integrally with the respective upper edge portion or be arranged on zipper element strips sealed to the respective upper edge portions.

Fig. 7 illustrates a first modification of the embodiment described with reference to
Fig. 5. In this modification the upper end portion of the top wall 3 is provided with an extension 53 which is folded down (at reference numeral 59) onto the outer face
of the upper edge portion 15 of the side wall 2. The free edge 54 of extension 53 is situated above the seam 41 providing the peelable connection 42 between the side wall 2 and the top wall 3. The extension 53 thus forms a flap on the bag allowing for reclosability.

The flap or extension 53 is further sealed to the outer face of the side wall 2 in the 15 area of the side seams 5,6 of the side wall. By suitably selecting the material forming the inner surface of the top wall 3 and the outer surface of the side wall, the flap is fusion-sealed to the side wall 2 in the area of the side seams 5,6, whereby optimum reclosability is obtained.

It should be noted that in the modification shown in Fig. 7 also the embodiments described with reference to Figs. 1 to 4 of the reclosable connections 12,32 may be used instead of the embodiment 42 described with reference to Fig. 5.

Moreover, it should be noted that the fold 59 also may be positioned at the same level as the opposed free edge of the top wall and the opposed side wall, as described below in connection with a further modification.

25 Fig. 8 illustrates a second modification of the embodiment described with reference

to Fig. 5. In this modification the upper edge portion 60 of the top wall 3 and the upper edge portion 58 of the side wall 2 are jointly folded down onto the side wall at reference numeral 55. The fold 55 is substantially at the same level as the opposed edge 61 of the top wall 3 and the upper edge 56 of the opposed side wall 1. By arranging the fold 55, the opposed edge 61 of the top wall and the upper edge 56 of the opposed side wall 1 at the same level a bag with good stackability is provided. The lower free edges of the upper folded-down edge portions 58, 60 extend beyond

the peelable connection 42 provided between the top wall 3 and the side wall 2 by

- 10 It should furthermore be noted that the hot-melt strip 47' extends onto the foldeddown edge portion 60 of the top wall 3. Thus, at the same time as the peelable connection 42 is provided in the sealing zone 41, an additional peelable connection is provided between the folded-down edge portions 58, 60 in a corresponding sealing zone 57.
- 15 It should be noted that also in the modification shown in Fig. 8 the embodiments described with reference to Figs. 1 to 4 of the reclosable connections 12,32 may be used instead of the embodiment 42 described with reference to Fig. 5.

5

the sealing zone 41.

Claims



1. Stand-up bag of a heat-sealable or weldable plastic film for containing in particular flowable or pourable products and comprising:

. 12

5 - two opposing side walls (1, 2) sealed together along lateral edges thereof by means of side seams (5, 6);

- an inwardly folded bottom wall (4) extending between the lower portions of the side walls (1, 2) and sealed to the respective side walls (1,2) along transverse bottom seams (7, 8) and along bottom side seams; and

10 - an inwardly folded top wall (3) extending between the upper portions of the side walls (1, 2) and connected to the respective side walls (1, 2) along transverse top connections (11, 12) and sealed to the respective side walls (1, 2) along top side seams,

c h a r a c t e r i s e d in that at least one of the transverse connections between the
top wall (3) and the side walls is a heat-sealed peelable connection (12, 32, 42, 52)
provided between an upper edge portion (16, 36) of the top wall (3) and an upper
edge portion (15) of the adjacent side wall (2).

Stand-up bag according to claim 1, c h a r a c t e r i s e d in that the upper edge portions (16, 36; 15) of the top wall (3) and of the side walls (2) extends
 beyond the transverse peelable connection (12, 32, 42, 52) to form gripping members.

3. Stand-up-bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (12) comprises a film strip (17) arranged between the upper edge portions (16,15) of the top wall (3) and the side wall (2), said film strip being firmly AMENDED SHEET

(non-peelably) heat-sealed to one of the edge portions, preferably to the edge portion of the top wall (3), the strip (17) having a first surface (18) of a sealing medium corresponding substantially to the sealing medium of the adjacent bag wall (3), and heat-sealed peelably to the second edge portion, preferably the edge portion (15) of the side wall (2), the strip (17) having a second surface (20) of a sealing medium heat-sealing peelably to the sealing medium of the adjacent bag wall.

4. Stand-up bag according to claim 3, and wherein the inner sealing medium of the bag walls is made substantially from polyethylene (PE), c h a r a c t e r i s e d in that the first outer sealing medium layer (18) of the film strip (17) comprises a mixture of PE and polybutylene.

5. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (32) comprises a film strip (37) arranged between the upper edges (16,15) of the top wall (3) and the side wall (2) and having a first and a second outer sealing medium layer (28,29) with which it is firmly (non-peelably) heat-sealed to the respective edge portions (16,15) and further having an intermediate layer (30) peelably connected to at least one of the outer sealing medium layers having a tear resistance weaker than the peel strength between the intermediate layer (30) and the said sealing medium layer.

6. Stand-up bag according to claim 5, c h a r a c t e r i s e d in that the20 intermediate layer (30) is a pressure-sensitive adhesive.

Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that the peelable connection (42) comprises a peelable strip of the hot-melt type applied to at least one of the two mutually facing surfaces (19,20) of the upper edge portions (16,15) of the top wall (3) and the side wall (2).

25 8. Stand-up bag according to one or more of the preceding claims,

5

c h a r a c t e r i s e d in that above the peelable connection (42) the upper edge portion (53) of the top wall is folded down to abut the outer face of the adjacent side wall (2).

9. Stand-up bag according to one or more of the claims 1 to 8,

5 c h a r a c t e r i s e d in that above the peelable connection (42) both the upper edge portions (60) of the top wall (3) and the upper edge portions (58) of the adjacent side wall (2) are folded down onto the adjacent side wall (2).

10. Stand-up bag according to claim 1 or 2, c h a r a c t e r i s e d in that in the area of the peelable connection (52) the upper edge portion (36) of the side wall or
10 top wall (3) is folded down for abuttuent inner face to inner face and that the wall (3) with the folded-down edge portion (36) has an outer sealing medium layer heat-sealing peelably to the inner sealing medium layer (20) of the other wall (2).

Abstract

ş

A stand-up bag of heat-sealable plastic film comprising two opposing side walls (1,2) sealed together along lateral edges thereof by means of side seams (5,6), an inwardly folded bottom wall (4) extending between the lower portions of the side walls (1,2)

- 5 and sealed to the respective side walls (1,2) along transverse bottom seams (7) and along bottom side seams, and an inwardly folded top wall (3) extending between the upper portions of the side walls (1,2) and connected to the respective side walls along transverse top connections (11,12) and sealed to the respective side walls (1,2) along top side seams. At least one of the transverse connections between the top wall (3)
- 10 and the side walls is a peelable connection (12) provided between an upper edge portion (16) of the top wall (3) and an upper edge portion (15) of the adjacent side wall (2).